

# 1N4933 THRU 1N4937

## FAST RECOVERY RECTIFIER

**GROWCHILD**  
ELECTRONICS™

**REVERSE VOLTAGE:** 50 to 600 VOLTS  
**FORWARD CURRENT:** 1.0 AMPERE

<http://www.njzrg.com>

### FEATURES

- High surge current capability
- 1.0 ampere operation at  $T_A=55$  with no thermal runaway.
- Void-free Plastic in a DO-41 package.
- Fast switching for high efficiency
- Exceeds environmental standards of MIL-S-19500/228
- Low leakage.

### MECHANICAL DATA

Case: Molded plastic, DO-41


Epoxy: UL 94V-O rate flame retardant

Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed

Polarity: Color band denotes cathode end

Mounting position: Any

Weight: 0.012ounce, 0.33gram

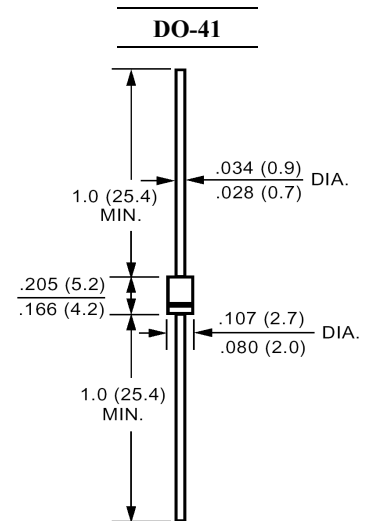

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25 ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	1N4933	1N4934	1N4935	1N4936	1N4937	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at $T_A=55$	$I_{(AV)}$	1.0					Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30					Amp
Maximum Forward Voltage at 1.0A DC and 25	$V_F$	1.2					Volts
Maximum Reverse Current at $T_A=25$ at Rated DC Blocking Voltage $T_A=100$	$I_R$	5.0 500					$\mu$ Amp
Typical Junction Capacitance (Note 1)	$C_J$	12					pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	50					/W
Maximum Reverse Recovery Time (Note 3)	$T_{RR}$	200					nS
Operating and Storage Temperature Range	$T_J, T_{stg}$	-55 to +150					

### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted.

3- Reverse Recovery Test Conditions :  $I_F=1.0A, V_R=30V$

# 1N4933 THRU 1N4937

## FAST RECOVERY RECTIFIER

**GROWCHILD**  
ELECTRONICS™

### RATINGS AND CHARACTERISTIC CURVES

<http://www.njzrg.com>

FIG. 1- MAXIMUM TYPICAL FORWARD CURRENT DERATING CURVE

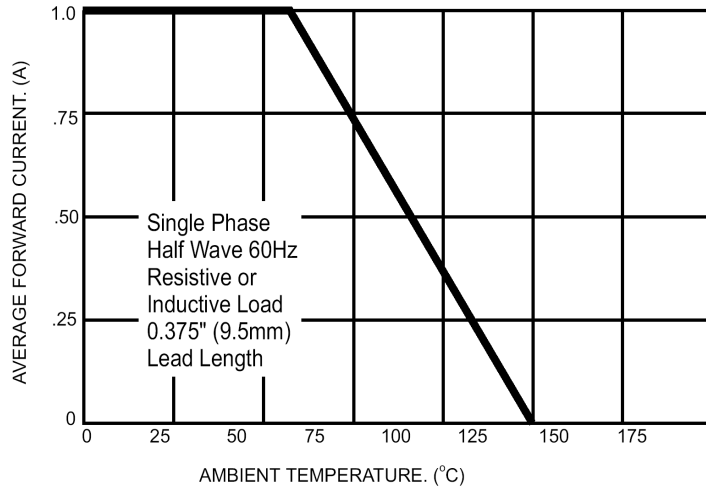


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

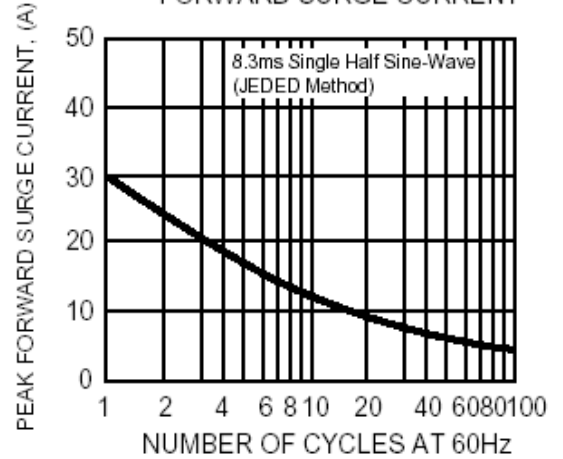


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

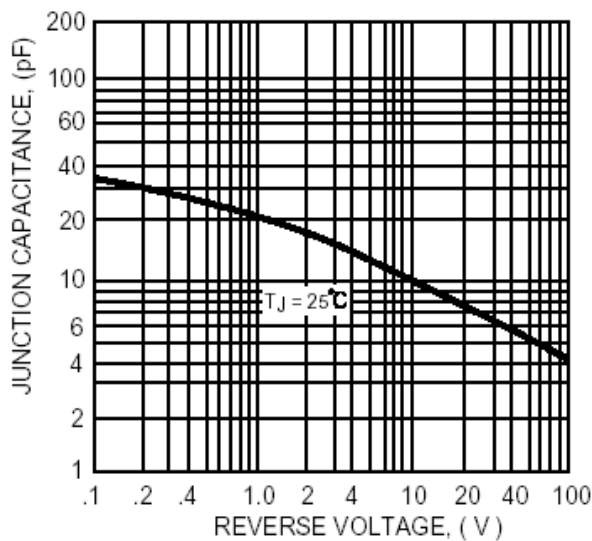


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

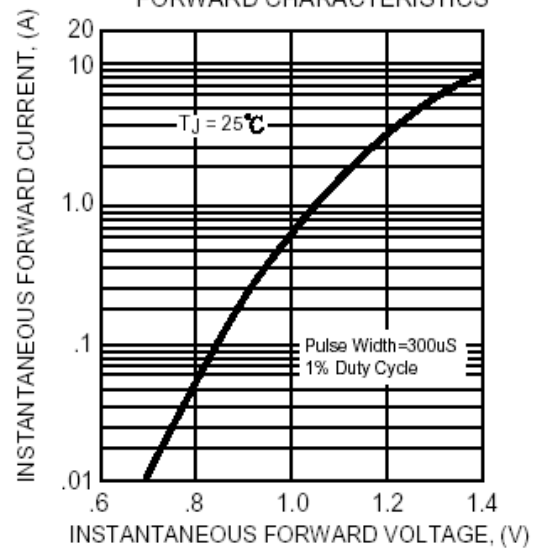


FIG. 5 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

