

BA157 THRU BA159

FAST RECOVERY RECTIFIER

REVERSE VOLTAGE: 400 to 1000 VOLTS
FORWARD CURRENT: 1.0 AMPERE


<http://www.njzrg.com>

FEATURES

- High surge current capability
- 1.0 ampere operation at $T_A=55$ with no thermal runaway.
- Void-free Plastic in a DO-41 package.
- Fast switching for high efficiency
- Exceeds environmental standards of MIL-S-19500/228
- Low leakage.

MECHANICAL DATA

Case: Molded plastic, DO-41
Epoxy: UL 94V-O rate flame retardant
Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
Polarity: Color band denotes cathode end
Mounting position: Any
Weight: 0.012ounce, 0.33gram

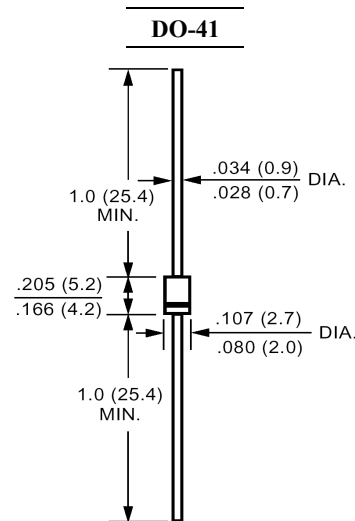

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25 ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

	Symbols	BA157	BA158	BA159	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	400	600	1000	Volts
Maximum RMS Voltage	V_{RMS}	280	420	700	Volts
Maximum DC Blocking Voltage	V_{DC}	400	600	1000	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at $T_A=55$	$I_{(AV)}$	1.0			Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30			Amp
Maximum Forward Voltage at 1.0A DC and 25	V_F	1.3			Volts
Maximum Reverse Current at $T_A=25$ at Rated DC Blocking Voltage $T_A=100$	I_R	5.0 500			μ Amp
Typical Junction Capacitance (Note 1)	C_J	12			pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	50			/W
Maximum Reverse Recovery Time (Note 3)	T_{RR}	150		250	nS
Operating and Storage Temperature Range	T_J, T_{stg}	-55 to +150			

NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted.
- 3- Reverse Recovery Test Conditions : $I_F=.5A$, $I_R=1A$, $I_{RR}=.25A$.

BA157 THRU BA159

FAST RECOVERY RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

<http://www.njzrg.com>

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

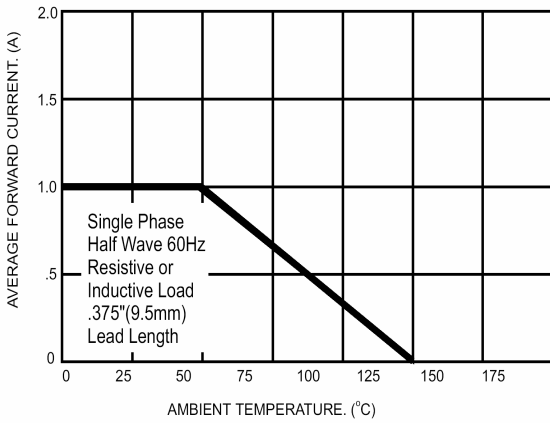


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

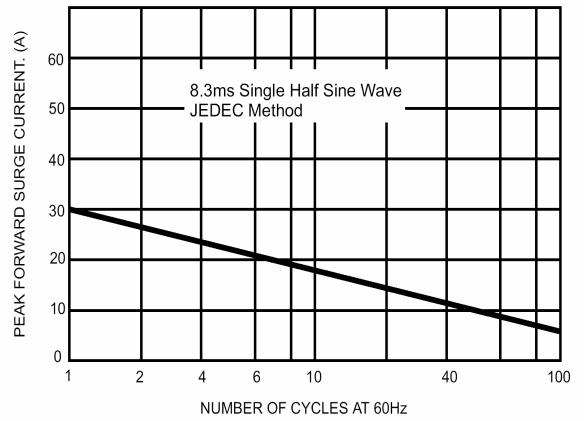


FIG.3- TYPICAL FORWARD CHARACTERISTICS

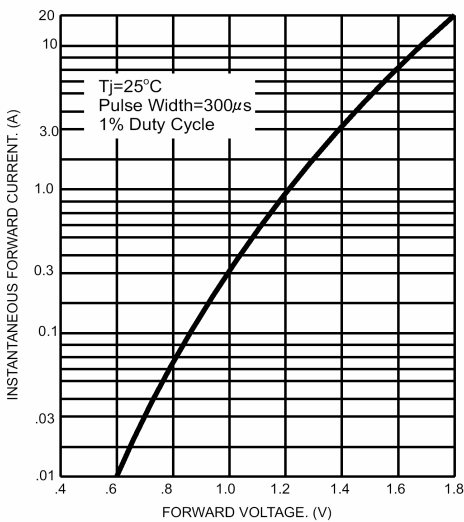


FIG.4- TYPICAL JUNCTION CAPACITANCE

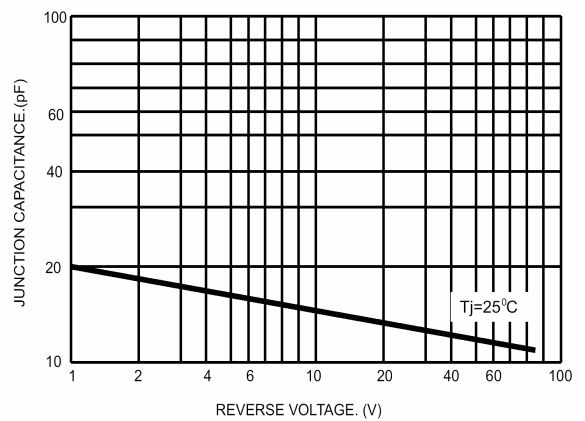


FIG.5- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

