

# UF5400 THRU UF5408

## ULTRAFAST RECOVERY RECTIFIER

**GROWCHILD**  
ELECTRONICS™

**REVERSE VOLTAGE:** 50 to 1000 VOLTS  
**FORWARD CURRENT:** 3.0 AMPERES

<http://www.njzrg.com>

### FEATURES

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Low cost
- Ultrafast recovery time for high efficiency
- Low forward voltage, high current capability
- Low leakage
- High surge capability

### MECHANICAL DATA


Case: Molded plastic, DO-201AD

Terminals: Plated axial leads, solderable per MIL-STD-202, method 208 guaranteed

Polarity: Color band denotes cathode end

Mounting position: Any

Weight: 0.04ounce, 1.1gram

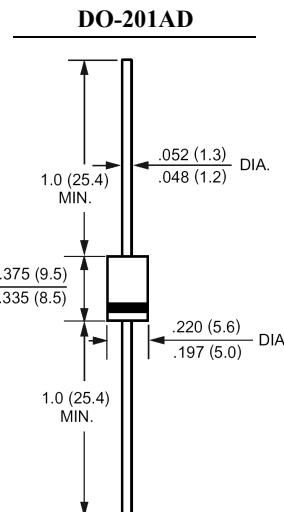

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25° ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	UF5400	UF5401	UF5402	UF5403	UF5404	UF5405	UF5406	UF5407	UF5408	Units
<b>Maximum Recurrent Peak Reverse Voltage</b>	<b>V<sub>RRM</sub></b>	50	100	200	300	400	500	600	800	1000	Volts
<b>Maximum RMS Voltage</b>	<b>V<sub>RMS</sub></b>	35	70	140	210	280	350	420	560	700	Volts
<b>Maximum DC Blocking Voltage</b>	<b>V<sub>DC</sub></b>	50	100	200	300	400	500	600	800	1000	Volts
<b>Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at T<sub>A</sub>=55</b>	<b>I<sub>(AV)</sub></b>	3.0								Amp	
<b>Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)</b>	<b>I<sub>FSM</sub></b>	150								Amp	
<b>Maximum Forward Voltage at 3.0A DC and 25</b>	<b>V<sub>F</sub></b>	1.0				1.7				Volts	
<b>Maximum Reverse Current at T<sub>A</sub>=25 at Rated DC Blocking Voltage T<sub>A</sub>=100</b>	<b>I<sub>R</sub></b>	10.0				1000				uAmp	
<b>Typical Junction Capacitance (Note 1)</b>	<b>C<sub>J</sub></b>	45				36				pF	
<b>Typical Thermal Resistance (Note 2)</b>	<b>R<sub>θJA</sub></b>	20								/W	
<b>Maximum Reverse Recovery Time (Note 3)</b>	<b>T<sub>RR</sub></b>	50				75				nS	
<b>Operating and Storage Temperature Range</b>	<b>T<sub>J</sub>, T<sub>Stg</sub></b>	-55 to +150									

### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance from Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted with 0.8x0.8" (20x20mm) copper pads.

3- Reverse Recovery Test Conditions : I<sub>F</sub>=.5A , I<sub>R</sub>=1A , I<sub>RR</sub>=.25A.

# UF5400 THRU UF5408


## ULTRAFAST RECOVERY RECTIFIER

**GROWCHILD**  
ELECTRONICS™


### RATINGS AND CHARACTERISTIC CURVES

<http://www.njzrg.com>


**Fig. 1 – Maximum Forward Current Derating Curve**

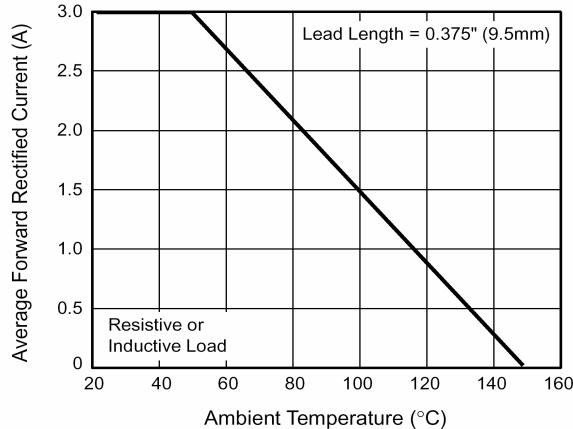


**Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current**

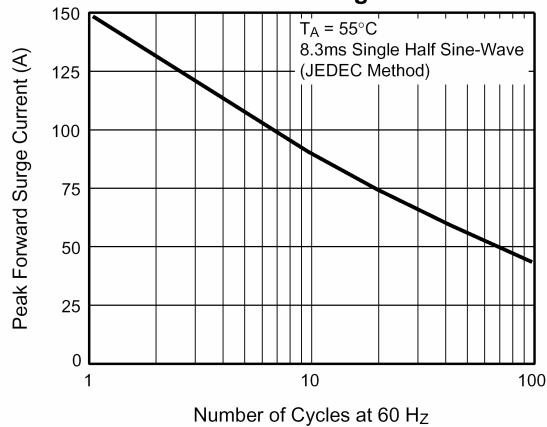

**Fig. 3 – Typical Instantaneous Forward Characteristics**

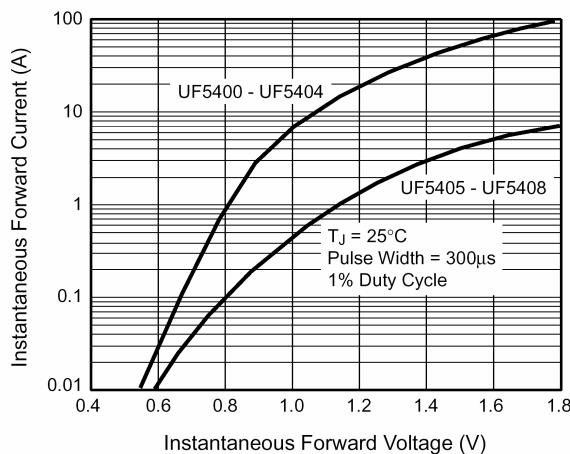

**Fig. 4 – Typical Reverse Leakage Characteristics**

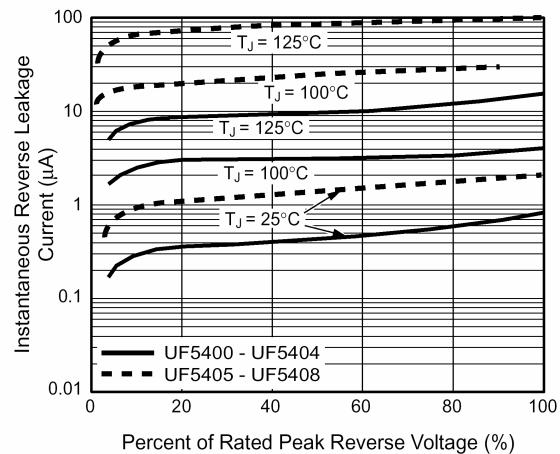

**Fig. 5 – Typical Junction Capacitance**

