

R1200 THRU R2000

HIGH VOLTAGE SILICON RECTIFIER

REVERSE VOLTAGE: 1200 to 2000 VOLTS

FORWARD CURRENT: 0.2 to 0.5 AMPERE

<http://www.njzrg.com>

FEATURES

- Low cost
- Low leakage
- Low forward voltage drop
- High current capability

MECHANICAL DATA


Case: Molded plastic, DO-41

Terminals: Axial leads, solderable per MIL-STD-202, method 208 guaranteed

Polarity: Band denotes cathode

Mounting position: Any

Weight: 0.013ounce, 0.3gram

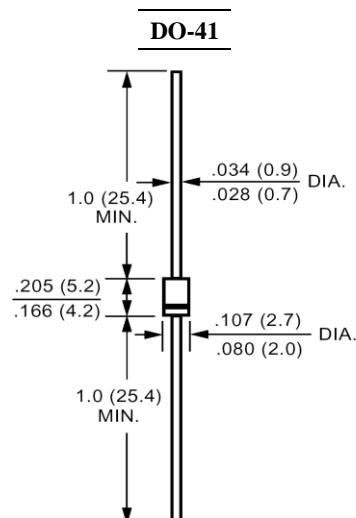

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	R1200	R1500	R1800	R2000	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	1200	1500	1800	2000	Volts
Maximum RMS Voltage	V_{RMS}	840	1050	1260	1400	Volts
Maximum DC Blocking Voltage	V_{DC}	1200	1500	1800	2000	Volts
Maximum Average Forward Rectified Current .375" (9.5mm) Lead Length at $T_A=55$	$I_{(AV)}$	0.5			0.2	Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30				Amp
Maximum Forward Voltage at 0.5/0.2A	V_F	2.0			3.0	Volts
Maximum Reverse Current at $T_A=25$ at Rated DC Blocking Voltage $T_A=100$	I_R	5.0				uAmp
Maximum Full Load Reverse Current Average, Full Cycle .375", (9.5mm) lead length at $T_L = 75$		30				
Typical Junction Capacitance (Note 1)	C_J	30				pF
Operating and Storage Temperature Range	T_J, T_{stg}	-55 to +150				

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

R1200 THRU R2000

HIGH VOLTAGE SILICON RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

<http://www.njzrg.com>

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

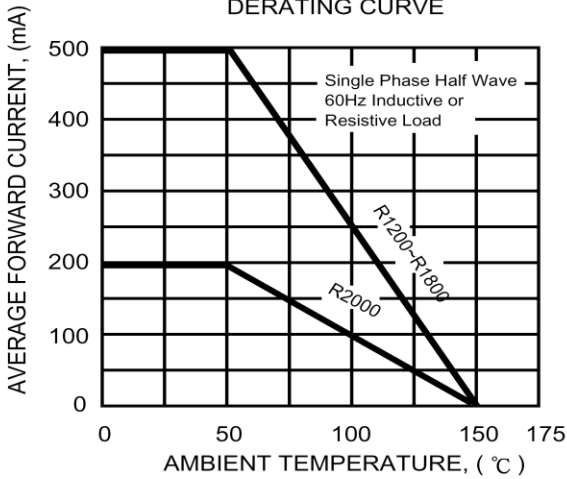


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

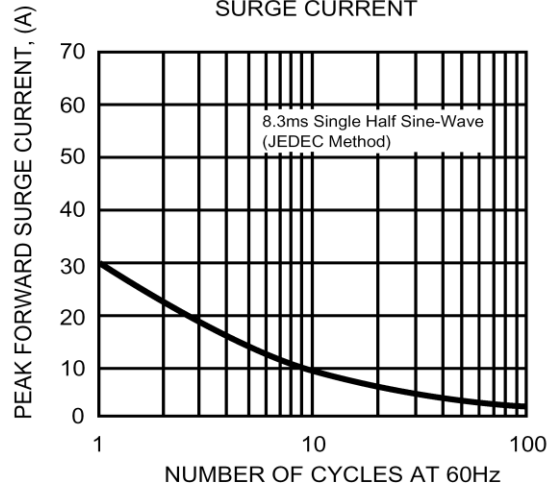


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

